


# Improving Positive Signal Headroom in eTap2hw

## eTap2hw

*A VINTAGE ECHO EMULATION*

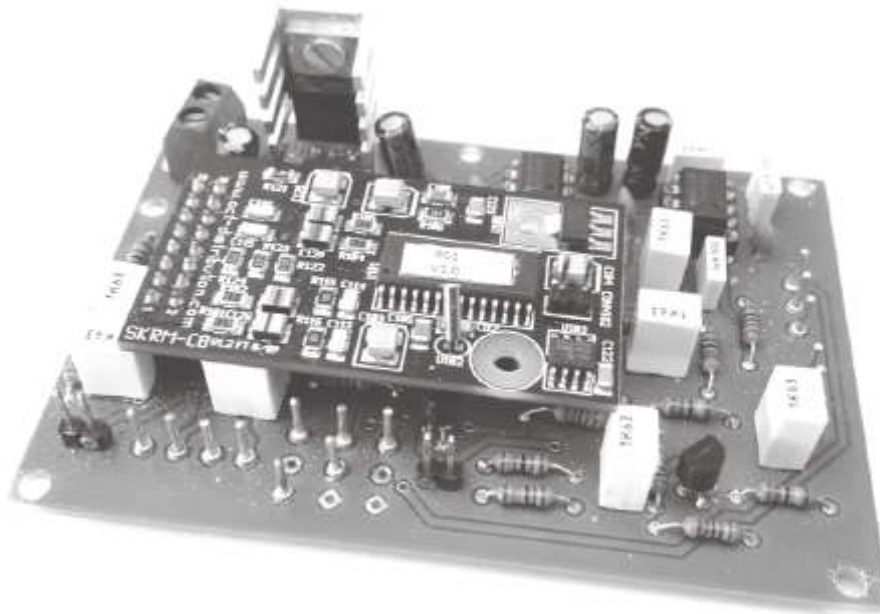

It has been brought to our attention that resistors R22 and R26 are unnecessary and put a DC offset voltage onto the input operational amplifiers' outputs. It is therefore recommended that these are simply clipped from the board. This will ensure that no clipping can occur during guitar transients as the 'positive voltage headroom' will be increased from less than 2V to greater than 4V.

